

Procedure for Testing OWL Optical Power Meters For Proper Operation

Fiber OWL 4 Series

Using Dual OWL Multimode Light Sources



Optical Wavelength Laboratories

Procedure for Testing Fiber OWL 4 Series Optical Power Meters For Proper Operation

USING OWL DUAL OWL SERIES MULTIMODE SOURCES

LIGHT SOURCE MODEL NUMBERS:

DO2-13xx
DO2xx


Testing Fiber OWL 4 Series Optical Power Meters for Proper Operation

USING A DUAL OWL MULTIMODE LIGHT SOURCE

NOTE: it is recommended to thoroughly clean and inspect all patch cord connectors before making any connection.

STEP 1 - Connect Fiber OWL 4 and Dual OWL


Connect the Fiber OWL 4 and Dual OWL together with an orange multimode patch cable as shown below.

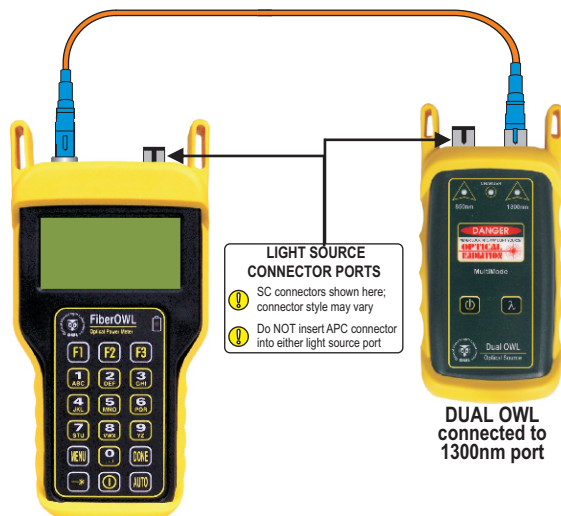

STEP 2 - Power ON the Fiber OWL 4

Press **F1** to power on the Fiber OWL 4.

After a few seconds, the OPERATING MODE screen will appear on the Fiber OWL 4 display, with SIMPLE METER being highlighted as shown at right.



STEP 3 - Enter SIMPLE METER

Press **F2** on the Fiber OWL 4 to enter SIMPLE METER.

The display should read 'UNDER' as shown at right.


By default, the wavelength will be set to '850nm' and the measurement units will be set to 'dBm'.



STEP 4 - Set Fiber OWL 4 to 1300nm

Press **F3** on the Fiber OWL 4.

The wavelength display will show '1300nm' as shown at right.



STEP 5 - Power ON the Dual OWL and set to 1300nm

Press **POWER** to power on the Dual OWL.


The 850nm indicator LED should be lit by default.



Press **WAVE** to set the Dual OWL to 1300nm. The right-hand indicator LED will now be lit.

STEP 6 - Measure optical power

The power reading that appears on the Fiber OWL 4 display will depend upon cable type. Consult the table below for a list of acceptable power readings.



Core Size	Acceptable Power Level	Replace at
62.5/125 μ M	-19.0 to -21.0 dBm	-21.00 dBm
50/125 μ M	-22.0 to -24.0 dBm	-24.00 dBm

NOTE: the following steps are only required if the optical power reading on the Fiber OWL 4 is too low.

STEP 7 - Replace the patch cable

The easiest way to troubleshoot low power levels is to try another patch cable. Over time, patch cables can wear out or become damaged the more they are used for optical loss testing. Replacing the patch cable usually fixes the problem.

STEP 8 - Clean patch cables and optical ports

If the problem still exists after patch cable replacement, there may be some debris, such as dust, dirt, or finger oil, that has collected on the connector endface or in the equipment optical ports.

Thoroughly clean and inspect the optical ports of the Fiber OWL 4 and the Dual OWL, as well as the fiber connector endfaces, according to the brochures that have been included with this kit. Several cleaning cycles may be required.

If the power level is still too low, even after a thorough cleaning and inspection and patch cable replacement, contact OWL technical support at 262-473-0643 for more information.